


Detection Pattern

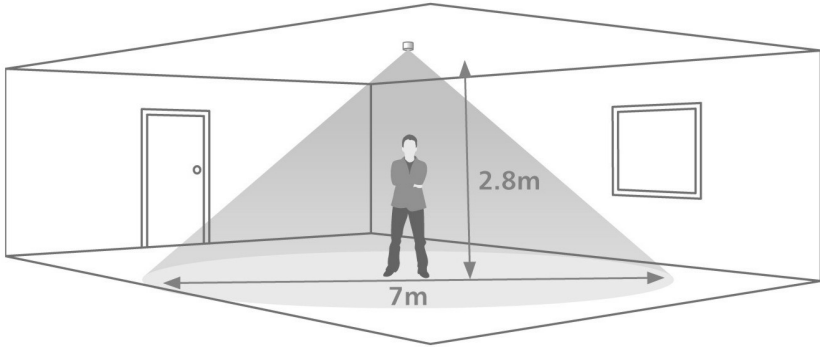

Area of high sensitivity  Area of lower sensitivity 

Specification

LOAD

6 Amp resistive load
2 Amp inductive load

SUPPLY VOLTAGE 12-24V AC/DC (+/- 10%)
TIME OUT PERIOD Adjustable 10s to 30m
LIGHT LEVEL Light to dark

TERMINAL CAPACITY 2.5 mm²

MATERIAL Flame retardant ABS

TYPE Class 2

TEMPERATURE -10°C to 35°C

CONFORMITY EMC-89/336/EEC
LVD-73/23/EEC



Part Numbers

EBDSPIR-24V-VFC Ceiling mounted presence detector with lux
EBDSPIR-24V-NL-VFC Ceiling mounted presence detector no lux
DBB Surface mounting back box

IMPORTANT NOTICE!

This device should be installed by a qualified electrician in accordance with the latest edition of the AS/NZS Wiring Rules and any applicable Building Regulations.

mySmart

Unit 16
1 Talavera Road
Macquarie Park, NSW 2112
Australia
T: 1300 697 627
F: (02) 9887 1333
www.mysmart.com.au